



Storage Tanks

200 Gallon ASME Certified Storage Tanks

125psi and 150psi models

Glass-Lined Steel Tank
with 5-Year Warranty


Twin 1" Magnesium Anode Rods

Two 1" NPT Connections for One or
More T&P Valves (Valves Not Included)

Factory Installed Brass Drain Valve

Powder Coated Steel Exterior

Cleanout Hand Hole

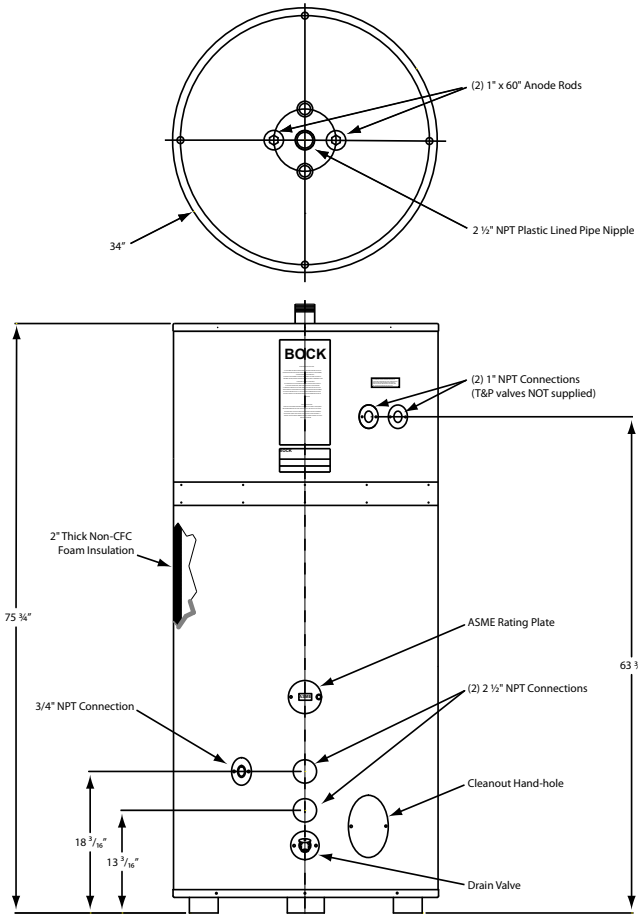

Model	Jacket	Storage (gal)	Overall Diameter	Overall Height/Length
200ST-A-125	Standard	200	34"	75.75"
200ST-A-150	Standard	200	34"	75.75"

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z.21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures: 200ST-A-125 - Working Pressure, 125 psi; Testing Pressure, 300 psi
200ST-1-150 - Working Pressure, 150 psi; Testing Pressure, 300 psi



www.bockwaterheaters.com
110 South Dickinson Street, Madison, Wisconsin 53703
Toll Free 800.794.2491 • Phone 608.257.2225 • Fax 608.257.5304

